

HPA-0 8 CS PLUS AIR SOURCE HYDRONIC HEATING HEAT PUMP

MANUFACTURED BY:

STIEBEL ELTRON

With its high quality equipment features, the HPA-0 8 CS Plus ensures that you have the best possible supply of DHW in your home at all times. The cooling function is included, provide yourself and your family with a refreshing level of living comfort even on hot days.

Benefits:

- Outdoor installation to harvest energy from the air and turn it into comfortable heating and cooling for your home.
- Increased efficiency through enhanced saturated vapour injection
- Energy efficient inverter technology
- Quiet operation; can be further reduced in night mode (silent mode function)
- Optional integration into the home network and control via smartphone
- Flow temperatures of up to 60°C for your DHW convenience

**5 YEAR*
WARRANTY**



ACCESSORIES

Internet-service gateway

The ISG web allows for an automated transfer of heat pump performance data to the internet service portal and remote service report. Homeowners have the option to control settings online through the STIEBEL ELTRON app.

T-Support

Bracket for installation on a strip foundation, white powder coated. Standard delivery includes: 2 pce, incl. screws for securing the heat pump to the bracket.

Wall Mounting Bracket

Wall mounting bracket made from corrosion-protected zinc-plated steel. Height-adjustable wall rail, the heat pump can be aligned with the aid of the appliance rail. Standard delivery includes: 2 pce, incl. anti-vibration mounts.



INTERNET- SERVICE GATEWAY



T-SUPPORT



WALL MOUNTING BRACKET



SUPPLIED BY:



7/25 Conquest Way
Hallam
VIC 3803
PHONE 03 8762 5690


craig@cambroboilers.com.au

www.cambroboilers.com.au


HPA-0 8 CS PLUS		
Energy efficiency class		A++
Rated voltage	V	230
Output at A7/W35 (EN 14511)	kW	4.86
Coefficient of performance at A7/W35 (EN 14511)		4.76
Cooling output	kW	14.88
Cooling capacity factor		6
Sound power level (EN 12102)	dB(A)	57
Max. temperature output on the heating side	°C	60
Height	mm	812
Width	mm	1152
Depth	mm	524
Weight	kg	91

HPA-0 8 CS PLUS			
A	Condensate drain	Ø mm	22
B	Flow	Ø mm	1"
C	Return	Ø mm	1"
D	Air intake		
E	Air discharge		

Dimensions

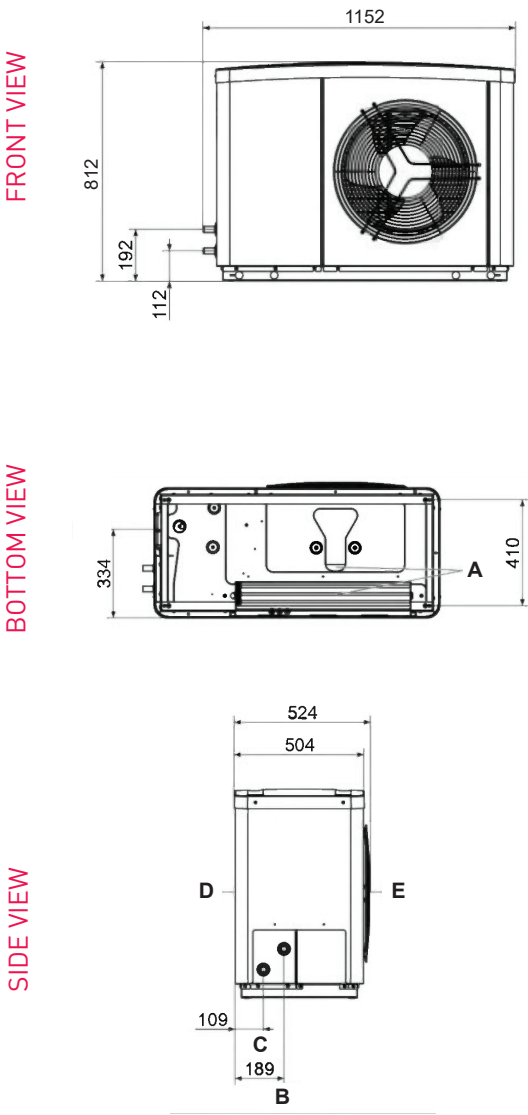

Minimum clearances

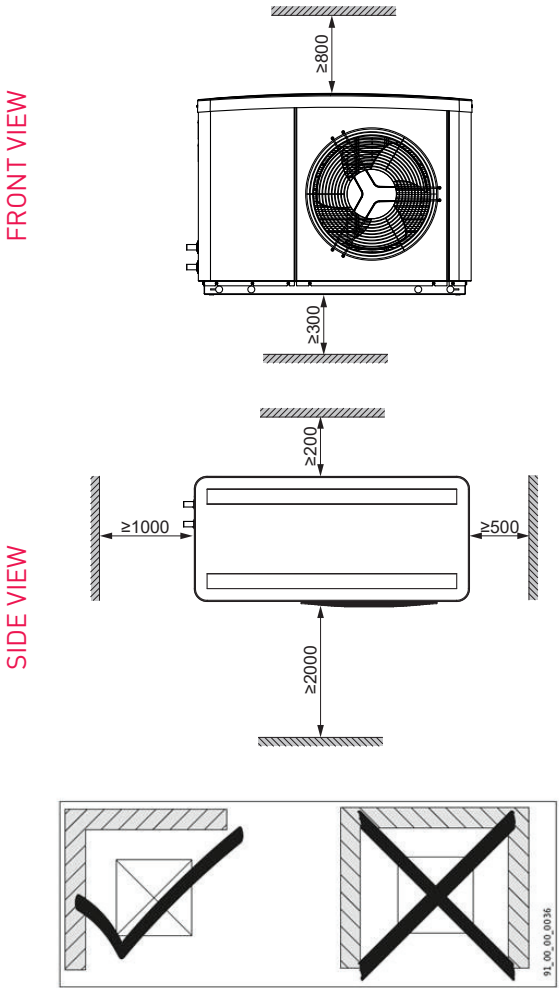

- Never install the appliance in a recess. Two sides of the appliance must remain exposed.
- Maintain the minimum clearances to ensure trouble-free operation of the appliance and facilitate maintenance work.

* Please contact Cambro Hydronic Heating for terms & conditions.